
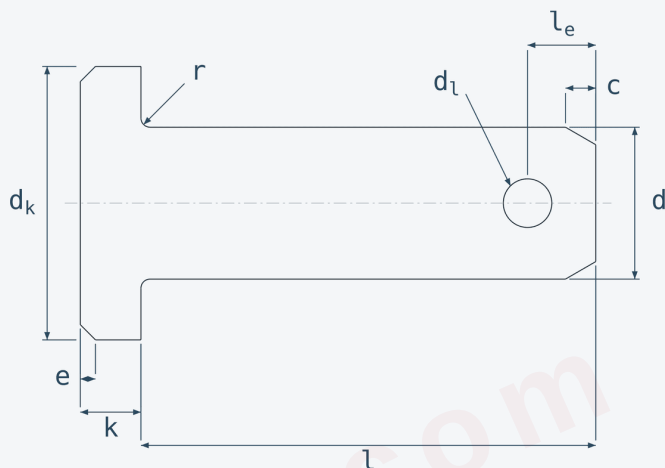


ISO 2341 Clevis Pin with Head

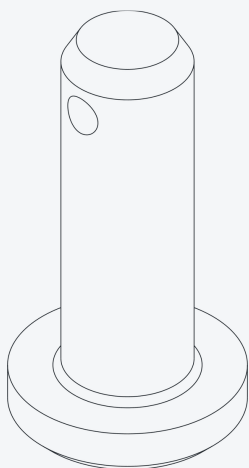

STANDARD

ISO 2341 Clevis pins with head

SIZES

3 - 100 · lengths 6 – 200 mm

SURFACE

Passivated, Plain, Zinc Plated

THREAD

ISO metric coarse pitch

MATERIAL

Stainless Steel, Carbon Steel

Dimensions follow the standard named on this sheet. Material properties and batch test results come with the order's certificate or test report.

BASIS OF SPECIFICATION

DIMENSIONS

ISO 2341:1986

DIMENSIONS

mm · ISO 2341

d	dk	d1	c max	e	k	le min	r
3	5	0.8	1	0.5	1	1.6	0.6
4	6	1	1	0.5	1	2.2	0.6
5	8	1.2	2	1	1.6	2.9	0.6
6	10	1.6	2	1	2	3.2	0.6
8	14	2	2	1	3	3.5	0.6
10	18	3.2	2	1	4	4.5	0.6
12	20	3.2	3	1.6	4	5.5	0.6
14	22	4	3	1.6	4	6	0.6
16	25	4	3	1.6	4.5	6	1
18	28	5	3	1.6	5	7	1
20	30	5	4	2	5	8	1
22	33	5	4	2	5.5	8	1
24	36	6.3	4	2	6	9	1
27	40	6.3	4	2	6	9	1
30	44	8	4	2	8	10	1
33	47	8	4	2	8	10	1
36	50	8	4	2	8	10	1
40	55	8	4	2	8	10	1
45	60	10	4	2	9	12	1
50	66	10	4	2	9	12	1
55	72	10	6	3	11	14	1
60	78	10	6	3	12	14	1
70	90	13	6	3	13	16	1
80	100	13	6	3	13	16	1
90	110	13	6	3	13	16	1
100	120	13	6	3	13	16	1

dk head diameter

d1 split-pin hole diameter

c end chamfer

e head edge thickness

k head thickness

le hole-to-end distance

r head radius

DOCUMENTS

EN 10204 3.1 material certificate, dimensional inspection report and mechanical test report, on request.